

HEAD OFFICE

TECO Electric & Machinery Co., Ltd
10F No.3-1, Yuan Cyu st.
Nan-kang Taipei 115
Taiwan ROC
TEL: +886 2 6615 9111
www.teco.com.tw/fa

UNITED STATES

TECO-Westinghouse Motor Company
5100 N IH-35
Round Rock Texas 78681 USA
Tel: +1 512 225 4141
+1 800 451 8798
Fax: +1 512 244 5512
Toll Free: +1 800 451 8798
www.tecowestinghouse.com

CANADA

TECO-Westinghouse Motors Inc. (Canada)
18060-109 Avenue, Edmonton, Alberta
T5S 2K2 Canada
Tel: +1 (780) 444 8933
Fax: +1 (780) 486 4575
24 HR Emergency ph:
+1 (780) 994 8964
Toll Free: +1 800 661 4023
Fax Toll Free: +1 888 USE TWMI
E-mail: webm@twmi.com
www.twmi.com

MEXICO

TECO Westinghouse Motor Company
S.A. de C.V.
Circuito Mexiamora Poniente No. 321
Col. Puerto Interior,
Parque Santa Fe CP 36275
Silao, Guanajuato., México
Tel: +52 (472) 748 9016 al 20
E-mail: ventas@tecowestinghouse.com

NETHERLANDS

Teco Electric & Machinery B.V.
Rivium 3e Straat 17
2909 LH Capelle a/d IJssel
The Netherlands
Tel: +31 (0)10 266 6633
Fax: +31 (0) 10 202 6415
E-mail:enquiries@teco-group.eu
www.teco-group.eu

UNITED KINGDOM

TECO ELECTRIC EUROPE LTD
7 Dakota Avenue, Salford M50 2PU
United Kingdom
Tel: +44 161 877 8025
Fax: +44 161 877 8030
www.teco-group.eu

GERMANY

TECO Electric and Machinery GmbH
Poststrasse 6
37441 Bad Sachsa, Germany
Tel: +49 (0) 5523 95340
Fax: +49 (0) 5523 9534 24
E-mail: postmaster@teco-westinghouse.de
www.teco-group.eu

SPAIN

C/Apostol Santiago, 38, 1-1,
28017 Madrid
Spain
Tel: +34 91 326 30 91
Fax: +34 91 326 30 91
www.teco-group.eu

MIDDLE EAST

Teco Middle East Electric & Machinery Co., Ltd.
2nd Industrial City, Dammam
PO Box #708, Dammam 31421
Kingdom of Saudi Arabia
Tel: +966 3 812 3939
Fax: +966 3 812 4823
Email: sales@teco-me.com

SAUDI ARABIA

Al Quraishi Electrical Services of S.A.
Al Quraishi Center, King Khalid Street,
P.O.Box 7386, Dammam-31462
Tel: +966 3 857-2537
Fax: +966 3 857-2541
Email : dannya@aqesa.com
www.aqesa.com

IRAN, AZERBAIJAN & ARMENIA

ATLAS DIBA Engineering & Trade Co.
No.3, Fakouri St., South Kadj Ave.
Golha Sq., Fatemi, Tehran, Iran
Tel: +98 21 88 33 03 81-3
Fax: +98 21 88 33 03 84
Email : info@atlasdibaco.com
www.atlasdibaco.com

EGYPT

Amosl & Co.
38 Mossadak Street Dokki, Giza, Egypt
Tel: +202 333 79 744
Fax: +202 376 20 307

TUNISIA and ALGERIA

AFRICA COMPANY
Route de Tunis km 1,
rue Hassan hosni Abdelwaheb - Imm Dammak,
Mezzanine Sfax 3002 - Tunisia
Tel: +216-74436585, +216-74436585
Fax: +216-74436587

TURKEY

TECO Elektrik Turkey A.S.
Yesilkoy Mah. Atatürk Caddesi No:12/1
EGS Business Park; B1 Blok 3. Kat; Daire No: 173-174
34149 - Bakirkoy/ Istanbul TURKEY
Phone: +90 212 465 4540
Fax: +90 212 465 4599
Mobile : +90 553 461 4848

SOUTH AFRICA

TECO Electric & Machinery Co. Ltd
E-mail: manish@teco.com.tw

AUSTRALIA

Teco Australia Pty Ltd.
335-337 Woodpark Road
Smithfield NSW 2164 Australia
Tel: +61 2 9765 8118
Fax: 61-2-9604-9330
E-mail: emd@teco.com.au
www.teco.com.au

NEW ZEALAND

Teco New Zealand Pty Ltd.
Unit 3, 477 Great South Road
Penrose Auckland New Zealand
Tel: +64 9 526 8480
Fax: 64 9-526-8484
E-mail: philr@teco.co.nz

JAPAN

Sankyo Co., Ltd.
26th fl. World Trading Center Bldg.
2-4-1 Hamamatsucho Minato-ku
Tokyo Japan 105-6126
Tel: +81 3 3435 9729
Fax: +81 3 3578 8381
E-mail: s.mabuchi@teco-japan.com
Website:www.teco-japan.com

SINGAPORE

Teco Electric & Machinery(PTE)Ltd.
18 chin Bee Drive
Singapore 619865
Tel: +65 6 265 4622
E-mail: ds@teco.com.sg
www.teco.com.sg

INDONESIA

P.T. Teco Multiguna Elektro
JL Bandengan Utara No. 83/1-2-3
Jakarta Utara-14440 Indonesia
Tel: +62 21 662 2201
Fax: 62-21-6697029

INDIA

TECO Electric & Machinery Co., Ltd.
New Delhi Office
Phone: 91-11-22314654
Mobile: 91-9873390999
Contact: Vijay Sankar
E-mail: vijay@teco.com.sg

CHINA

Shanghai Office
Rm 321 Building No.6
Lane 1279 Zhongshan W. Rd.
Shanghai, P.R.C
Tel: +86 21 5116 8255
Fax: +86 21 6278 8761

Wuxi Teco Electric & Machinery Co., Ltd
No. 9 South of Changjiang Road,
New Zone, Wuxi
Jiangsu Province, P.R.C.
Tel: +86 510 8534 2005
Fax: +86 510 8534 2001
www.wuxiteco.com

Jiangxi Teco Electric & Machinery Co., Ltd
189 Dongyuan Rd. Hi-Tech Zone, Nanchang
Jiangxi Province, P.R.C.
Tel: +86 791 819 5999
Fax: +86 791 816 7730

SUZHOU TECO Electric & Machinery Co., Ltd
No.1 Changjiang W.Rd.
South-Dam Industrial Park,
Liuhe Town,Taicang City,
Suzhou,Jiangsu Province, P.R.C.
Tel: +86 512 5361 9901
Fax: +86 512 5396 1058

FUJIAN TECO PRECISION CO.,LTD
Xiayang, Jizhao, Zhanggang village,
Saiqi Economical & Development Zone,
Fuan, Fujian, P.R.C.
TEL: +86 593 633 0300
FAX: +86 593 633 0303

HONG KONG

Tecoston Industrail Development
(HK) Co., Ltd
Rm 3712 Hong Kong Plaza
186-191 Connaught Rd. West
Hong Kong
Tel: +852 2858 3220
E-mail: tecohkg@netvigator.com

MALAYSIA

Plo 52, Jalan Firma 2/1,
Kawasan Perindustrian Tebrau 1,
81100 Johor Bahru, Johor, Malaysia
Tel: (60) 7-3518862 / (60) 7-3548008
Fax: (60) 7-3546107
E-mail: sales@teco.com.my

THAILAND

Teco Electric & Machinery
(Thai) Co., Ltd.
128/1 Soi Watsrivarenoi
Moo 7 Bangna-Trad Road Km 18
Bangchalong Bangplee
Samuthprakarn 10540 Thailand
Tel: +662-3371311-20
Fax: +662-337-1630-1

VIETNAM

Teco (Vietnam) Electric & Machinery Co.,Ltd.
KON LONG Thanh,Huyen Long Thanh
Tinh Dong Nai. Vietnam
Tel: +84 61 3514151
Fax: +84 61 351 4110

PHILIPPINES


Trade One, Incorporated
No. 56 Aragon Street San Francisco
Del Monte 1100 Quezon City Metro Manila,
Philippines
Tel: (632) 371-3032
Fax: (632) 371-1175
www.tradeoneinc.com



Non-Sparking AEHBXC

Squirrel Cage Induction Motor

- High Efficiency
- Three Phase
- Low Voltage
- For hazardous areas

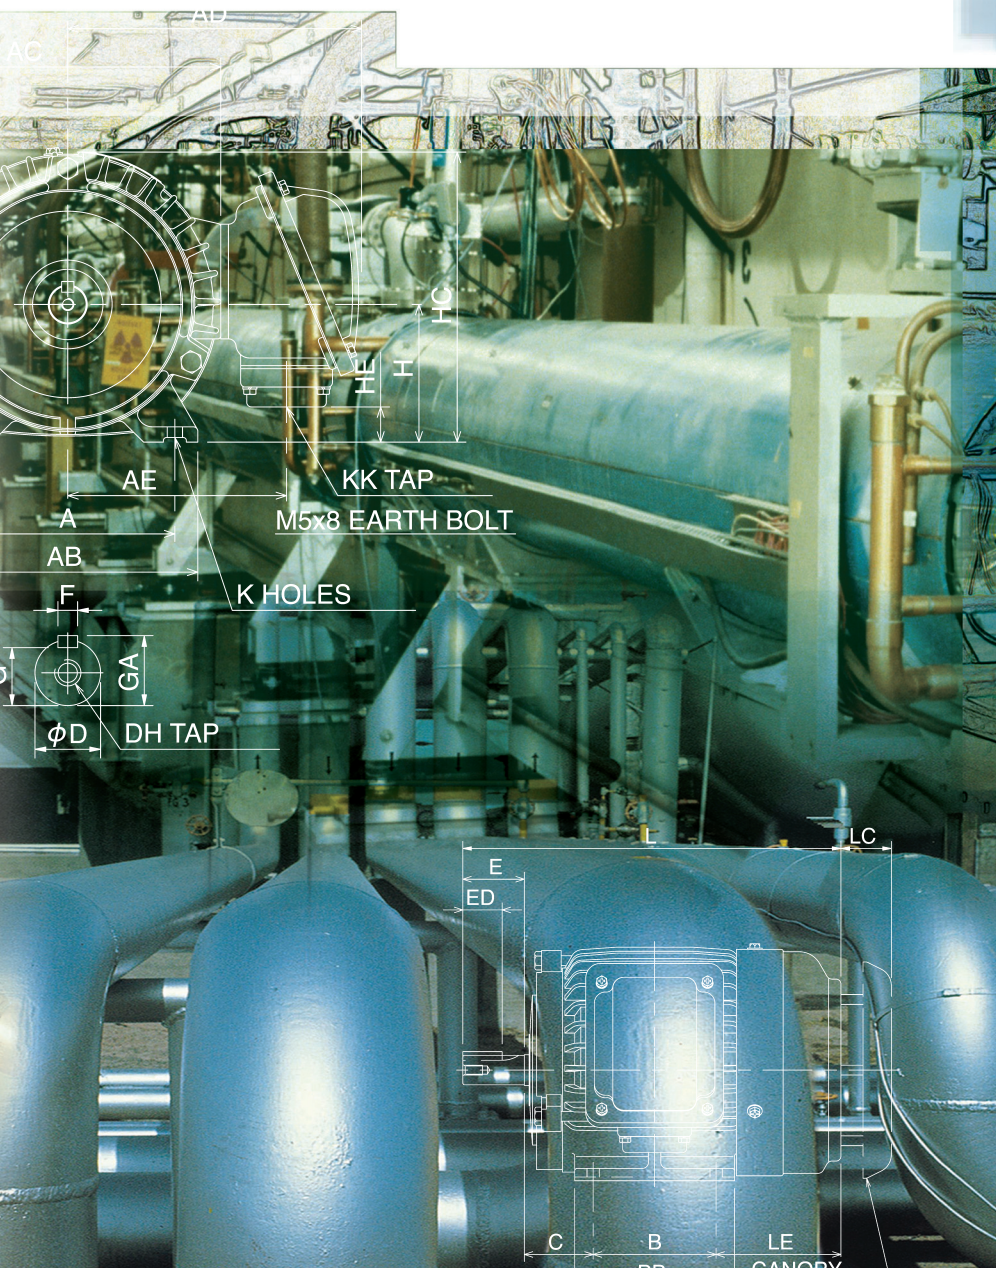

Non-Sparking

Squirrel Cage Induction

Type of Protection n

Zone 0 / 20

Continuously

Permanent presence of explosive atmosphere in normal operation

Zone 1 / 21

Occasionally

In normal operation an explosive atmosphere is likely to occur

Zone 2 / 22

Accidental

In normal operation an explosive atmosphere is not likely to occur, unless by a failure, but for a short period of time.

TECO		TYPE N MAX-E1			
		PREMIUM EFFICIENCY			
		3-PHASE INDUCTION MOTOR			
NOM. EFF.		MIN. EFF.			
CODE				RATING	CONT.
OUTPUT	KW	FRAME			IP55
POLES	INS.	MODEL			
Hz	VOLT				
RPM	AMP'S				
BRG.				DATE	
WEIGHT	KG	AMB TEMP			°C
SER. NO.					
TYPE:  II 3G EEx nA T3-BAS02ATEX3304X					
BS EN50021:1999					
TECO Elec. & Mach. Co., Ltd.					



II 3 G

EEx nA T3

The European Commission mark for Ex products

ATEX Coding

Explosive

Non-sparking

Surface Temperature

To permit the motors to be used with inverter drives. PTC thermistors or RTDs are also fitted to motor windings to permit the monitoring of winding temperatures. The marking of these motors shall then include the following

 II 3 G EEx nA T2

Non-Sparking

Squirrel Cage

Type of Protection n: AEHBXC

This series of motor is applied to electric equipment which do not cause ignition of an explosive atmosphere under normal operating conditions.

Characteristics:

- Terminal box components as well as connection cables must be firmly fastened (without allowing any movement)
- T3 classification as per maximum internal and external surface temperature.
- Increased safety terminal blocks/bushings to avoid arcs and sparks and high air and surface distances between to conductive parts (clearances and creepages)
- Construction particularities to avoid arcs or sparks between static and rotating parts during normal operation:
 - specific air gaps
 - rubbing seals materials
 - rotor construction
 - fans material and peripheral speeds

Basic Design

Enclosure

The standard protection is to IP55 for B3 (IM1001) mounting.

Performance

The motor is the efficiency complies with the AS/NZS specification of "Minimum Energy Performance Standards"(MEPS)All standard motors are designed to meet BS 4999, BS 5000, BS EN50021.

Environment Conditions

Standard motors are designed to operate in an ambient temperature of $-20^{\circ}\text{C} \sim 55^{\circ}\text{C}$, Relative humidity: less than 90%RH (Non-Condensation).

Altitude

Standard motors are designed for operation and performance at an altitude not exceeding 1,000 meters.

Direction of Rotation

All standard motors are suitable for operation in either direction of rotation.

Bearing

For 80 to 180 (4+ poles) frame sizes ball bearing are mounted in the stator end brackets, V-ring viton seals are fitted on the shaft and pressed up against each end bracket.

The 180 (2 pole) to 250 frame sizes may have ball bearings at each end or ball bearing and a roller bearing.

These are mounted in cast iron covers which are bolted each side of the bearings and are secured by through bolts locked with spring washers.

The inner bearing covers have an integral labyrinth seal. V-ring or oil seals manufactured from viton are fitted on the shaft and pressed up against each outer bearing cover.

Non-Sparking

Squirrel Cage Induction

Basic Design

Rotor

The rotor core is manufactured from laminated punchings with cast aluminium rotor bars and endrings. The rotor core is then pressed or shrunk on to a machined shaft and may be secured by a key way.

Stator

The stator laminations are built of high grade electromagnetic steel for high efficiency, with insulated windings and is dipped in an insulating varnish before being pressed into the stator frame.

The windings are class F insulated. Coil wires are insulated with a heavy build heat-resistant polyester coating.

Terminations

The mains terminal box is a cast iron enclosure secured to the stator frame with screws and spring washers. The fixing screws also secure a terminal block with stud terminals which is located inside the enclosure.

The stator leads are fitted with crimped lugs with insulated shanks and are fixed to the terminal studs between two nuts with plain washers.

The supply leads are to be terminated on the same studs and further nuts with spring washers are supplied to secure the supply leads, fitted with crimped lugs, to the terminal stud.

The neutral leads are terminated on the main terminal block and brass links are provided to connect the windings correctly.

Earthing

The external earth facility is located on the stator frame and comprises an M5 to M10 screw, depending on frame size, with a shakeproof washer and two plain washers.

The internal earth facility is located in the rear of the mains terminal box and comprises an M5 to M10 earthing screw, depending on the size of the terminal box, which is fitted with shakeproof and plain washers in a tapped hole in the stator frame. The earth screws are marked with the standard earth symbol.

Efficiency

The motor is AS/NZS MEPS efficiency and consume less energy. With inverter control, it can use in constant speed and varuant speed motor.

Non-Sparking

Squirrel Cage Induction

Basic Design

Ventilation

The motor is cooled by air passing over the external surface of the stator frame and a shaft mounted fan is provided to drive airflow.

The fan is secured by a clamp and screw and enclosed by a pressed steel cover which is fixed to the stator end bracket. Air is drawn through the punched openings and expelled through gaps between the cooling fins on the stator.

For vertical shaft down machines a steel canopy is fixed over the fan cover to prevent foreign bodies from falling directly into the ventilation openings.

The shaft mounted fan may be manufactured from anti-static polypropylene or phosphor bronze.

Frame & End bracket

The motors are totally enclosed with a cast iron stator frame incorporating cooling fins on the external surface. Cast iron end bracket supporting the shaft bearings are fixed to the stator frame at each end.

Frame sizes 80 to 132 have through bolts which pass the length of the stator frame and clamp the end brackets to the stator. Frame size 160 to 250 machines have tapped holes in the stator frame. The end brackets are manufactured from cast iron and are located by spigot joint.

Drain plugs may be fitted in the bottom of the stator or end bracket.

Painting

Phenolic rust proof base plus lacquer surface finished painting in light-gray color (Munsell N5)

Testing

In addition to a full programme of tests during manufacture, each motor undergoes an automatic routine test to BS 4999 and full voltage measuring starting performance.

Optional

Thermistors, anti-condensation heaters.



OUTLINE DIMENSIONS: AEHBXC

Totally Enclosed Fan-Cooled Type, Squirrel-Cage Rotor.

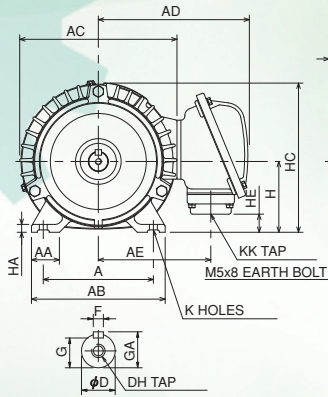


FIG. 1

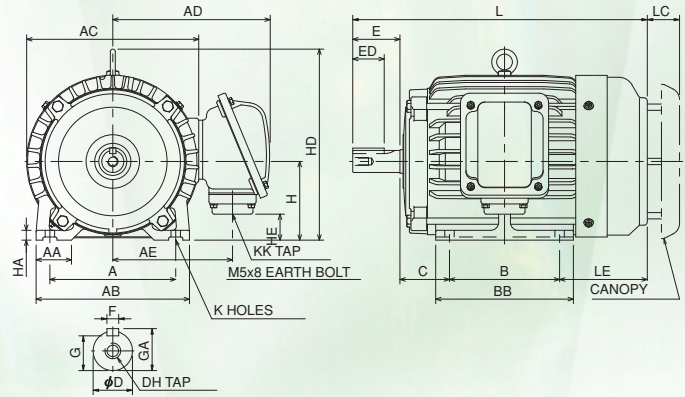


FIG. 2

Dimension in mm

Output (kW)			FRAME SIZE	FIG. NO.	A	AA	AB	AC	AD	AE	B	BB	C	H	HA	HC	HD	K
2P	4P	6P																
0.75 1.1	0.75	—	80	1	125	35.5	155	177	179	130	100	130	50	80	9.0	168	—	10
1.5	1.1	—	90S		140	35.5	170	200	192	143	100	130	56	90	10.0	190	—	10
2.2	1.5	1.1	90L		140	35.5	170	200	192	143	125	150	56	90	10.0	190	—	10
3	2.2 3	1.5	100L	2	160	45.0	195	219	202	153	140	175	63	100	12.5	243	243	12
4	4	2.2	112M		190	45.0	224	238	211	162	140	175	70	112	14.0	265	265	12
5.5 7.5	5.5	3	132S		216	45.0	250	273	249	187	140	175	89	132	16.0	310	310	12
—	7.5	4 5.5	132M		216	45.0	250	273	249	187	178	212	89	132	16.0	310	310	12
FRAME SIZE	KK		L	LC	LE	SHAFT EXTENSION						BEARING		APPROX. WEIGHT KGS.				
						D	E	ED	F	G	GA	DH	DRIVE END		OPPOSITE DRIVE END			
80	M20 × P1.5		283	41.0	93	19	40	25	6	15.5	21.5	M6 × 12	6204ZZ	6204ZZ	17.5			
90S	M20 × P1.5		308	41.0	102	24	50	32	8	20.0	27.0	M8 × 16	6205ZZ	6205ZZ	21.5			
90L	M20 × P1.5		333	41.0	102	24	50	32	8	20.0	27.0	M8 × 16	6205ZZ	6205ZZ	26.5			
100L	M20 × P1.5		375	41.0	112	28	60	40	8	24.0	31.0	M10 × 20	6206ZZ	6305ZZ	35			
112M	M20 × P1.5		392	48.0	122	28	60	40	8	24.0	31.0	M10 × 20	6306ZZ	6306ZZ	46			
132S	M25 × P1.5		454	48.0	145	38	80	64	10	33.0	41.0	M12 × 24	6308ZZ	6306ZZ	75			
132M	M25 × P1.5		492	48.0	145	38	80	64	10	33.0	41.0	M12 × 24	6308ZZ	6306ZZ	82			

Note: 1. Tolerance of shaft wnd diameter D: Under $\phi 19 \sim \phi 28$: j6, $\phi 38$: k6.
2. Tolerance of shaft center high H: +0, -0.5.

OUTLINE DIMENSIONS: AEHBXC

Totally Enclosed Fan-Cooled Type, Squirrel-Cage

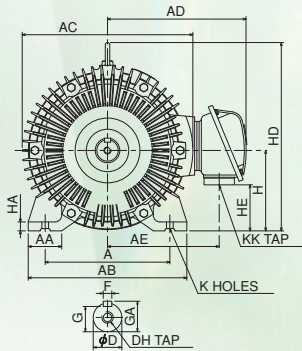


FIG. 3

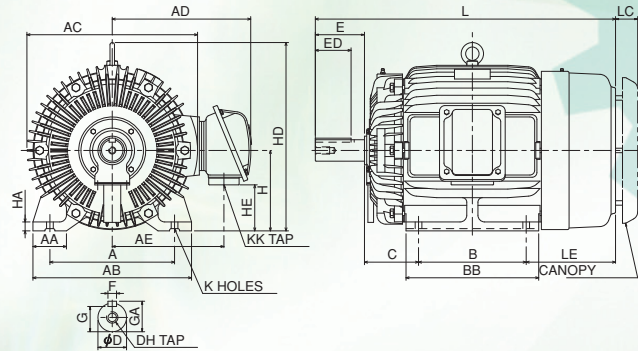


FIG. 4

Dimension in mm

Output (kW)			FRAME SIZE	FIG. NO.	A	AA	AB	AC	AD	AE	B	BB	C	H	HA	HD	HE	K
2P	4P	6P																
11 15	11	7.5	160M	3	254	50	300	334	287	225	210	250	108	160	18	377	83	14.5
18.5	15	11	160L		254	50	300	334	287	225	254	300	108	160	18	377	83	14.5
22	—	—	180MA	4	279	75	355	382	312	250	241	297	121	180	20	431	103	14.5
—	18.5	—	180MC	3	279	75	355	382	312	250	241	297	121	180	20	431	103	14.5
—	22	15	180LC		279	75	355	382	312	250	279	335	121	180	20	431	103	14.5
30 37	—	—	200LA		318	80	400	420	374	287	305	365	133	200	25	469	88	18.5
—	30	18.5 22	200LC		318	80	400	420	374	287	305	365	133	200	25	469	88	18.5
—	37	—	225SC		356	90	450	458	427	330	286	350	149	225	30	524	57	18.5
45	—	—	225MA	4	356	90	450	458	427	330	311	375	149	225	30	524	57	18.5
—	45	30	225MC		356	90	450	458	427	330	311	375	149	225	30	524	57	18.5
55	—	—	250SA		406	100	500	510	493	375	311	385	168	250	36	595	42	24.0
—	55	37	250SC		406	100	500	510	493	375	311	385	168	250	36	595	42	24.0
75	—	—	250MA		406	100	500	510	493	375	349	425	168	250	36	595	42	24.0
—	75	45	250MC		406	100	500	510	493	375	349	425	168	250	36	595	42	24.0
FRAME SIZE	KK	L	LC	LE	SHAFT EXTENSION							BEARING		APPROX. WEIGHT KGS				
					D	E	ED	F	G	GA	DH	DRIVE END	OPPOSITE DRIVE END					
160M	M32 × P1.5	608	42	180	42	110	80	12	37.0	45.0	M16 × 32	6309ZZ	6307ZZ	130				
160L	M32 × P1.5	652	42	180	42	110	80	12	37.0	45.0	M16 × 32	6309ZZ	6307ZZ	158				
180MA	M32 × P1.5	672	50	200	48	110	80	14	42.5	51.5	M16 × 32	(6211C3)	(6211C3)	180				
180MC	M32 × P1.5	672	50	200	48	110	80	14	42.5	51.5	M16 × 32	6311ZZ	6310ZZ	180				
180LC	M32 × P1.5	710	50	200	48	110	80	14	42.5	51.5	M16 × 32	6311ZZ	6310ZZ	205				
200LA	BSC 1.5"	770	55	222	55	110	80	16	49.0	59.0	M20 × 40	(6312C3)	(6212C3)	280				
200LC	BSC 1.5"	770	55	222	55	110	80	16	49.0	59.0	M20 × 40	6312	6212	280				
225SC	BSC 2"	816	60	241	60	140	110	18	53.0	64.0	M20 × 40	6313	6213	320				
225MA	BSC 2"	811	60	241	55	110	80	16	49.0	59.0	M20 × 40	(6312C3)	(6212C3)	355				
225MC	BSC 2"	841	60	241	60	140	110	18	53.0	64.0	M20 × 40	6313	6213	358				
250SA	M63 × P1.5	883	71	264	60	140	110	18	53.0	64.0	M20 × 40	(6313C3)	(6213C3)	470				
250SC	M63 × P1.5	883	71	264	70	140	110	20	62.5	74.5	M20 × 40	NU216	6213	510				
250MA	M63 × P1.5	921	71	264	60	140	110	18	53.0	64.0	M20 × 40	(6313C3)	(6213C3)	540				
250MC	M63 × P1.5	921	71	264	70	140	110	20	62.5	74.5	M20 × 40	NU216	6213	565				

Note: 1. Tolerance of shaft end diameter D: Under $\phi 42 \sim \phi 48$: k6, $\phi 55 \sim \phi 70$: m6.
2. Tolerance of shaft center high H: +0, -0.5.